



60W Integrated solar street light IND-ISTL-60

60W

Philips 3030 60W
8100~8400LM

IP65

Water proof
construction with
Aluminum & Steel

2YEARS

Warranty for 2years

Brief Info


1. Material: Aluminium + Steel glass
2. Solar Panel: 18V 50W High efficiency mono crystalline solar cell
3. LED Brand: Philips 3030 60W 8100~8400LM
4. Battery: lithium battery 12V 21AH
5. Mounting Height:6-7 m
6. Discharge Time: adjustable wet weather 5 to 7 days
7. Working Temperature:- 30°C ~+60°C
8. Charge Time: 6 Hours with good sunshine
9. Lighting mode: 100% bright lighting infrared motion sensor + 60% lighting before midnight and 30% lighting till dawn (energy saving mode to prolong backup rainy days)

- 1.Product size: 940*305*140mm
- 2.Weight(N.W): 10.5KG
- 3.Carton size: 1000*390*220mm
- 4.Packaging volume: 0.086CBM
- 5.Weight (G.W): 12KG

General Info

Specifications

Nominal Wattage (W)	60W	Beam Angle	120
LED Brand	Philips 3030	Power Efficiency (LM/W)	160~170
LED QTY (Pcs)	90	CCT	3000K~6500K
System Efficacy (LM/W)	135~140	Nominal Lamp Life(h)	50000
Luminous Flux (LM)	8100~8400LM	Power Factor	>0.95
CRI	80/90	IP	IP65
Junction Temperature	70	Storage Temperature	-40°C~+70°C
Output Voltage (V)	DC 12V	Operating Temperature	-30°C~+60°C
Output Voltage Solar(V)	DC 18V	Operating Humidity	15~90%RH

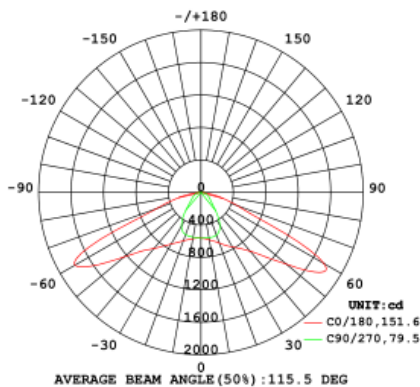

412 N Main St, Ste 100, Buffalo, WY 82834
 Tel: +1 307 217 6336, info@indsecom-us.com,
www.indsecom.com