




S922 Waterproof, Dustproof and Shockproof Portable Fingerprint Time Attendance Terminal

Introduction

The S922 is a unique portable fingerprint time attendance terminal with a rubber coating. It is specifically designed for off-site time management, such as construction sites, logitic industries, large farms, and the mining industry. Adopting a rubber coating process, its waterproof and dustproof efficacy reached an IP65 protection grade. There is a handle at the top of the rubber coating, which enables users to carry it easily. Above all, the S922 is shockproof (1m above the ground) due to its unique rubber coating.

TCP/IP and USB-host are standard communication modes. It also has options for GPRS, Wi-Fi and 3G (WCDMA) connectivity, which makes data management extremely convenient. the S922 can be used in multiple authentictions that support fingerprint, Proximity card or Mifare card.





Copyright © 2012, ZKTeco, Inc. All rights reserved. ZKTeco may, at any time and without notice, make changes or improvements to the products and services offered and/or cease producing or commercializing them. The ZKTeco logo and trademark are the property of ZKTeco Inc.






Features:

- * Built-in 7600 mAh battery powered 28 hours of standby time,16 hours of operation time
- * Communication via TCP/IP, USB-host and optional with GPRS, Wi-Fi and 3G (WCDMA)
- * IP65 rated waterproof and dustproof protection grade
- * Shockproof (1m above the ground)
- * Rubber coated protection
- * Convenient carry case design

Configuration:

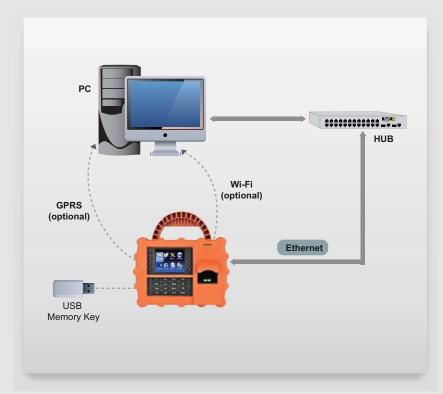

Specifications:

Fingerprint Capacity	5, 000 (Standard) /10,000 (Optional)
Card Capacity	30,000 (Optional)
Transaction Capacity	200,000
Fingerprint Sensor	ZK Optical Sensor
Algorithm Version	ZKFinger VX10.0
Communication	TCP/IP, USB-host; Optional with GPRS,
	Wi-Fi, and 3G (WCDMA)
Standard Functions	ADMS, Work-code, DST, Scheduled-bell,
	Self-Service Query, Automatic Status
	Switch, T9 Input, Photo-ID, 9 Digit
	User ID, Short Message.
Optional Functions	Proximity card or Mifare card
Protection Grade	IP65
Display	3.5-inch TFT Screen
Power Supply	12V 3A DC; Built-in Backup
	7600 mAh Battery
Operating Temperature	0℃- 45 ℃
Operating Humidity	20%-80%
Dimension	225 *235*125(mm) H*W*D



ZKTeco Inc.

ZK Mansion,Wuhe Rd,Gangtou,Bantian,Buji Town,Longgang District,Shenzhen China 518129 Tel:+86-755-8960 2345/46/47/48 Fax:+86-755-8960 2675 www.zkteco.com

Global Service Hotline: USA: + 1 732-412-6007 EU: +34 916532891 Brazil: +55 31 2515-8326 Thailand: +66-29144238 Mexico: +52-55-52078969 South Africa: +27 12 259 1047 Egypt: +202-24055541 Dubai: +971 4 6091 310 India: +91-0124-2623170 Indonesia: +62 21 2921 8949



