

# X628-C

## 3-inch Fingerprint Time & Attendance Terminal



### Introduction

The firmware of X628-C has been upgraded to the New Firmware. It brings many new experiences, including the new stunning GUI, rock-solid stability, faster matching speed and better expandability.

Users can easily manage data by networking X628-C via RS232/485, TCP/IP, and USB-host. Most importantly, all the functions can still operate in a networking state. X628-C is compatibility with various types of USB flash disks, ADMS and former SDK. It also supports data backup and retrieve to avoid the risk of accidental deletion.

It promotes the fingerprint time & attendance management to the next level. You can get the best of benefits from the X628-C.

### Features

#### Remarkable user experience

- \* Intuitive and stunning UI designed with the most popular and internationalized element.
- \* Interface operation adopts modularized hierarchical design. Simpler, better and more logical.
- \* Faster matching speed: less than 0.5 second.

#### Enhanced features and performance

- \* User validity settings.
- \* Data backup and retrieve.
- \* Advanced User ID consisted of letters and numbers.
- \* Chip encryption for firmware protection.
- \* More flexible menu configuration: double line text display.
- \* Built-in Serial and Ethernet ports

#### Excellent expandability


- \* Easy to extend functions and customize customers demand.




# Specifications

Fingerprint Capacity	3000
ID Card Capacity	10,000 (Optional)
Record Capacity	100,000
Display	3-inch Screen
Communication	RS232/485, TCP/IP,USB-host
Standard Functions	Workcode, SMS, DST, Scheduled-bell, Self-Service Query, Automatic Status Switch
Optional Functions	ID/Mifare/HID, Webserver, External Printer, 9 digit user ID, WiFi, Photo ID,ADMS, USB-client,
Software	ZKTime 5.0 (Free), ZKTime. Net
Power Supply	DC 5V 2A
Verification Speed	≤0.5 Sec.
Operating Temp.	0°C - 45°C
Operating Humidity	20%-80%
Dimension	190*135.8*51.5mm (Length*Width*Thickness)
Net Weight	0.9 kg


## Dimensions (mm)

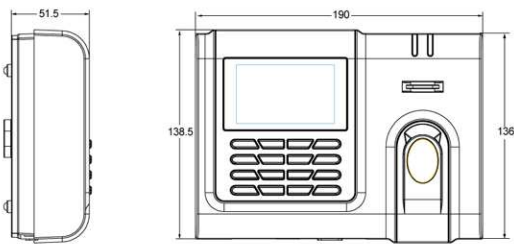

## Interface

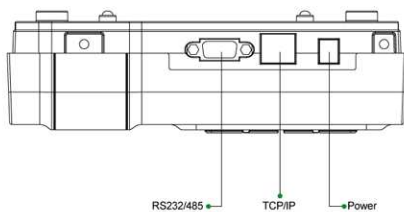

## Configuration

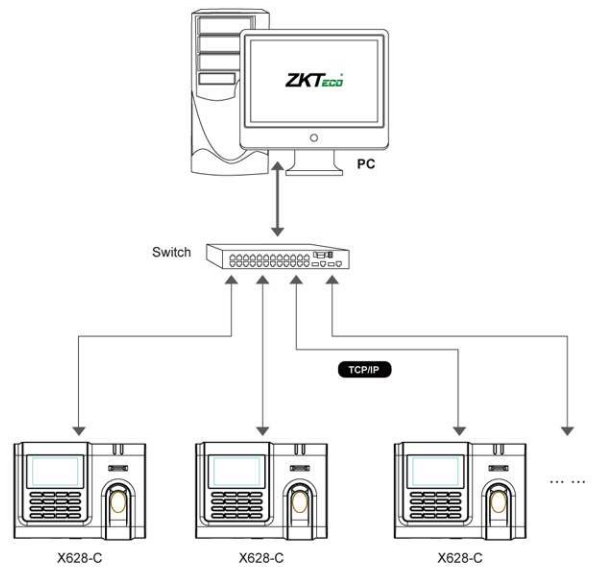

## Package List

- X628-C
- Back Plate
- Screws and Holders
- Software CD (ZKTime 5.0)
- Mini USB Cable
- Power Adapter
- 1.5 M Network Parallel Line